



Goffi
INDUSTRIES S.r.l.

Inside the Factory



Before knowing us,
you already,
have a guarantee:
the name




**WE PROCEEDED WITH A SUCCESS
AFTER THE OTHERS.**

Inside the 22.000 square meter Factory innovation is always the main features (here, first in Italy, the welding automatic system) producing wheelbarrows, scaffolding, adjustable props, trestles and many others products for building market. Quality Products always forward projected unique as our Customers.



**A SIXTY YEAR-OLD-SUCCESS
BUILT UPON TRUST.**

If you know building industry, you know Goffi Industries Company: since sixty years it is a benchmark in this market. From a simple carpentry specialized in wheelbarrows production, in the 1968 was borne F.lli Goffi that in 1997 become Goffi Industries. A Company based on innovation that, due to the historical legacy from F.lli Goffi Company, rely on achieve a relevant position on building market. A purpose that is confirmed by the increasing investments in human resources and technologies with a consequently turnover growth.

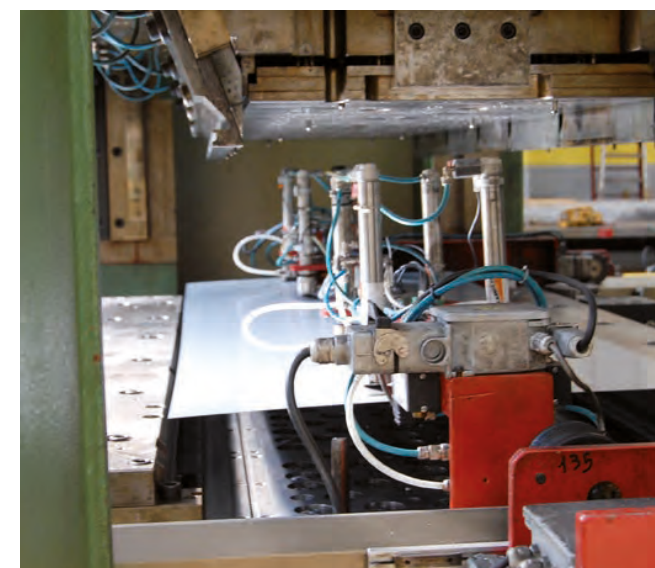



Goffi range: simply immense

OUR JOB EVERY DAY? IMPROVING YOURS.

In Italy and Europe we are known for our famous wheelbarrow Aurea. The real legacy of F.lli Goffi, the Aurea wheelbarrow with its updates versions is the demonstration of a superior quality and performance as all the Products of Goffi Industrie Edilizia. A sign of a forty years tradition continues to guarantee the quality of our planned choices. Everything from research, automatic production, safety on working place is oriented to improve performances and quality level of our Products and consequently of your construction site.

SAFETY WORK IS A RECOGNIZED VALUE.

Before any Products gets to the market, it is rigorously tried and tested: the quality of Goffi Industrie Edilizia pass through testing every components according to EU certification. Scaffolding are having ministerial approval with GIE mark.




Index

8	Scaffolding
17	Chutes Scaffolding accessories
18	Props
22	Wheelbarrows
24	Accessories
26	Certifications

Scaffolding

props | wheelbarrows | accessories

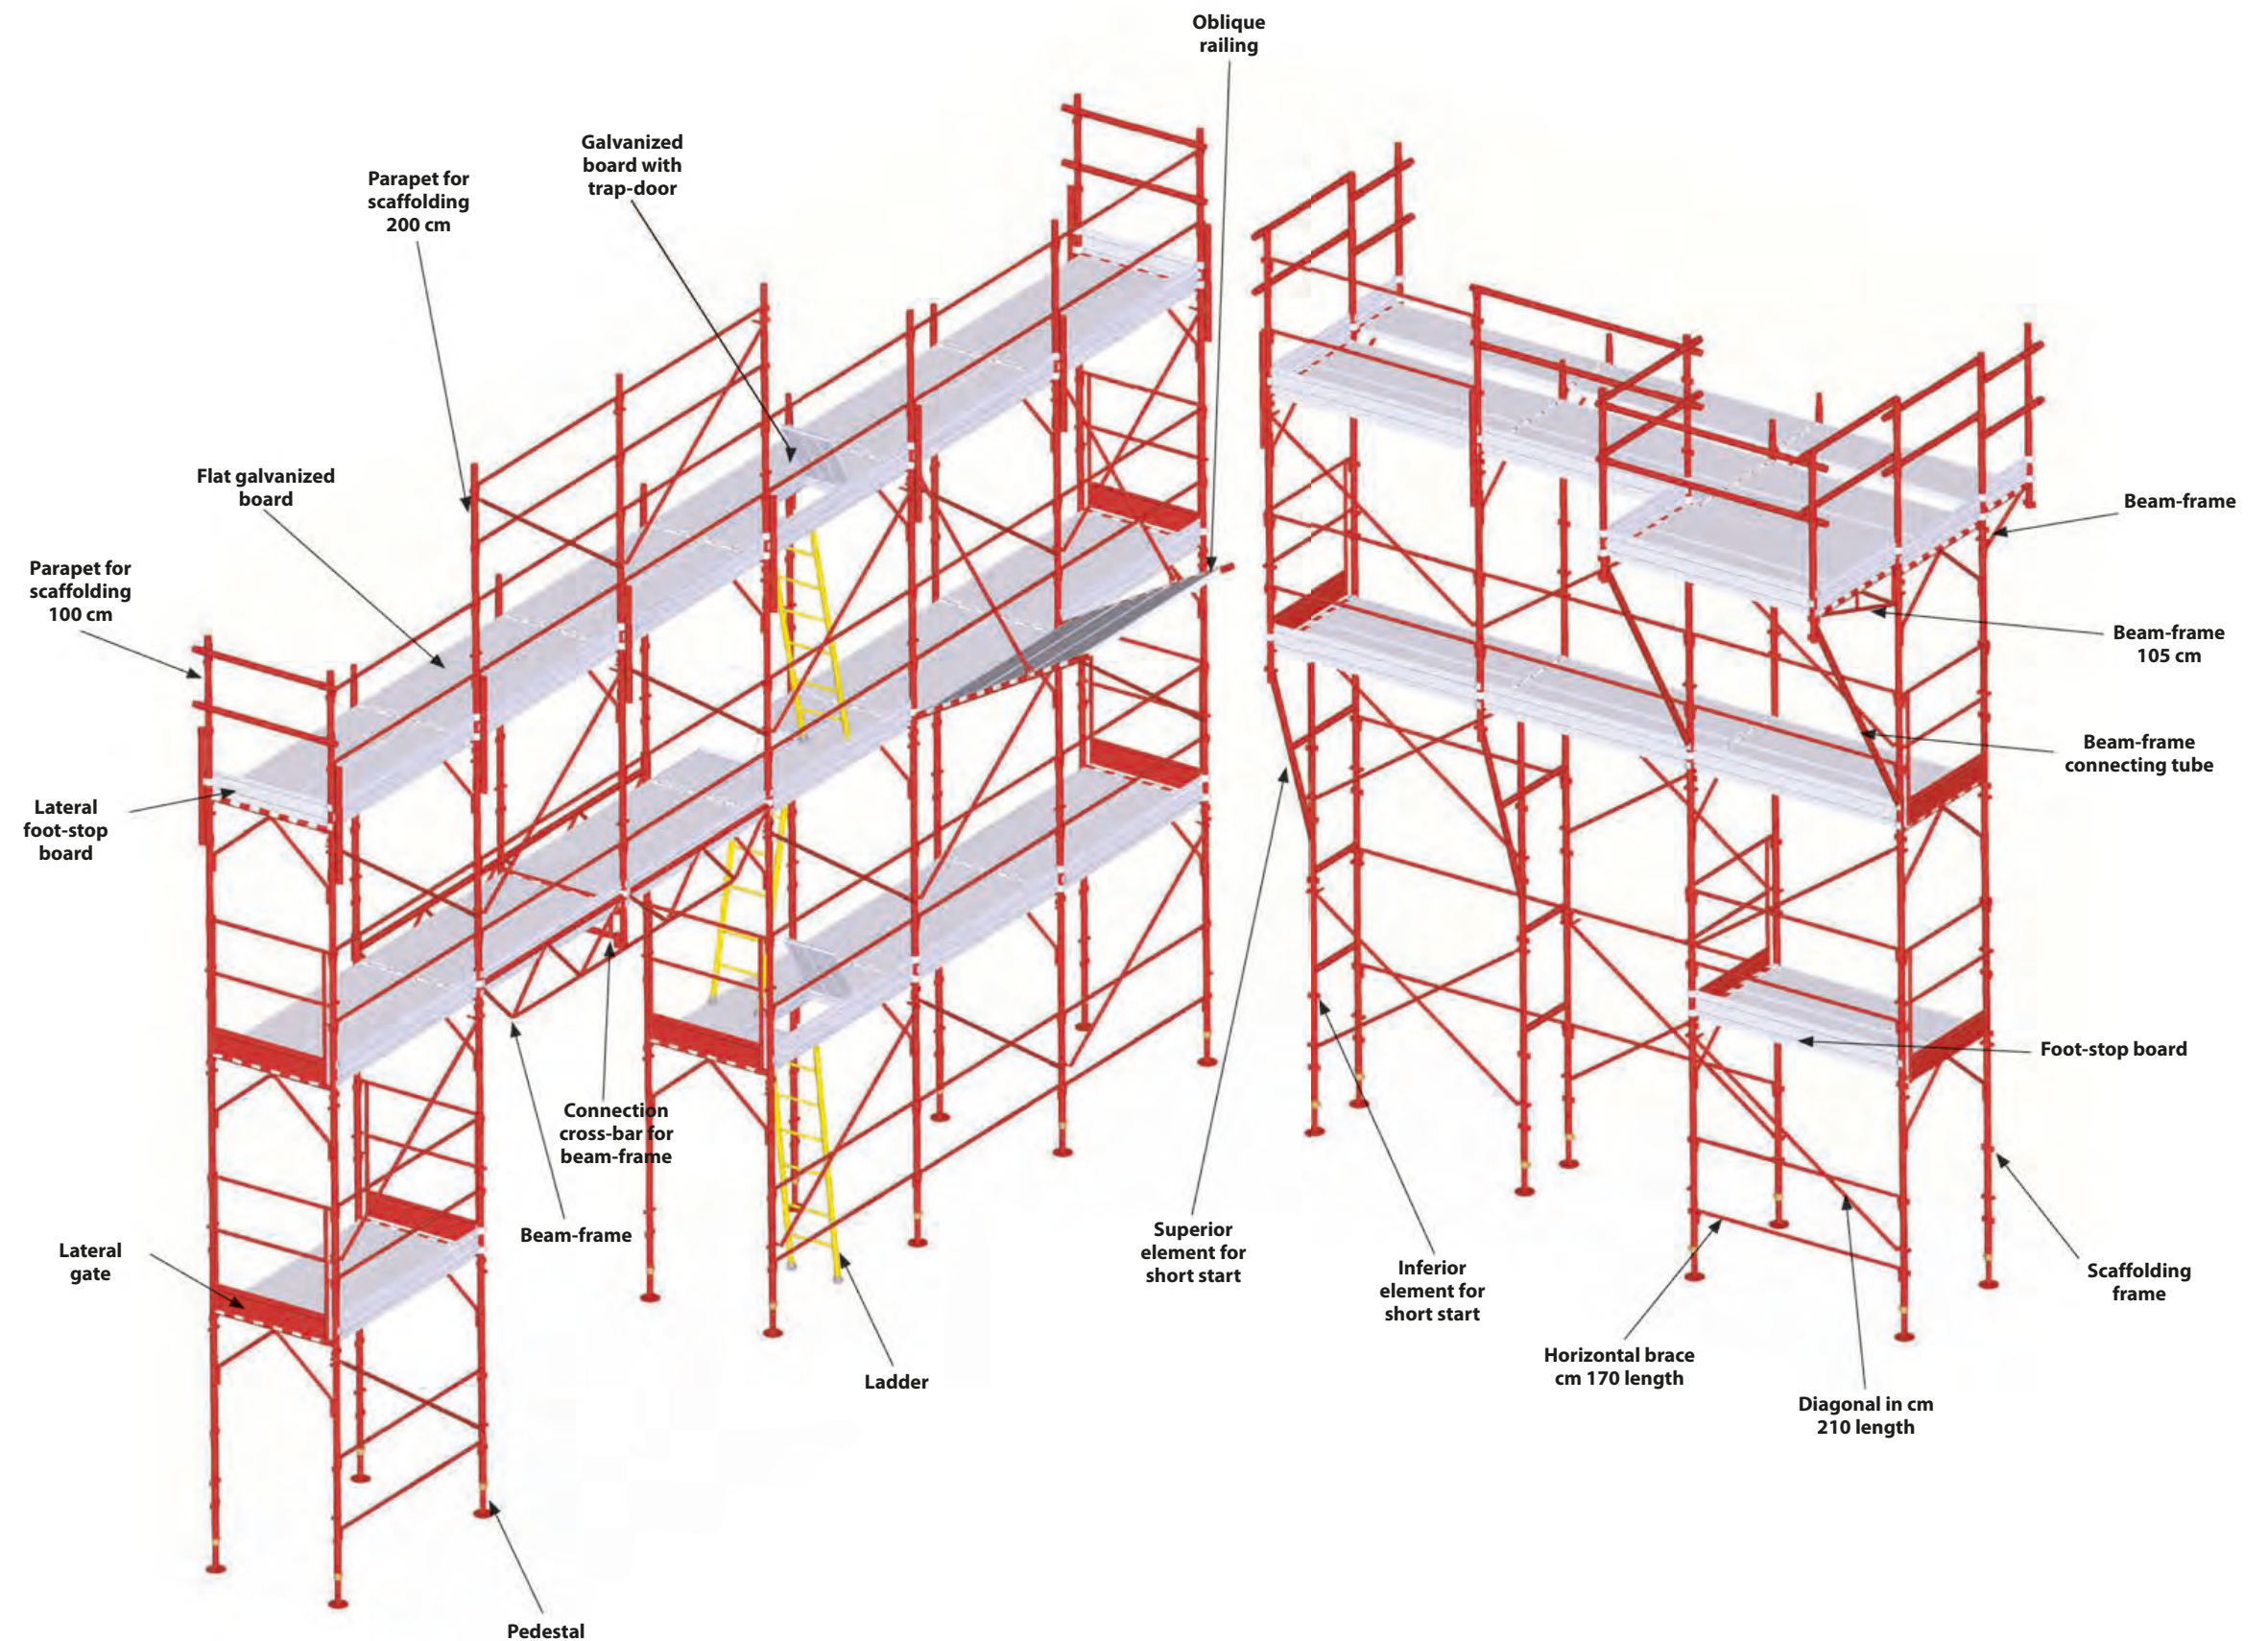

Scaffolding

props | wheelbarrows | accessories

BUSHING SCAFFOLDING 105 CM INTERAXIAL PAINTED FRAME

ART 12002
105 cm interaxial
110 cm length
Ø 48 mm tube
210 cm height



BUSHING SCAFFOLDING 105 CM INTERAXIAL PAINTED HALF FRAME

ART 14200
105 cm interaxial
110 cm length
Ø 48 mm tube
110 cm height



DIAGONALS - BRACES

ART. 13001
Bushing scaffolding painted diagonal
210 cm length, Ø 27 mm tube
ART. 13002
Bushing scaffolding painted plan cross diagonal
202 cm length, Ø 27 mm tube
ART. 13003
Bushing scaffolding painted horizontal brace
170 cm length, Ø 27 mm tube
ART. 13004
Bushing scaffolding 105 painted small lateral brace
105 cm length, Ø 27 mm tube



STANDARD CONTAINER SCAFFOLDING-50/60 FRAMES

ART. 15200
105 painted bushings and pins
(123x230x10 cm)
ART. 15215
105 painted bushings
(123x230x10 cm)



BUSHING SCAFFOLDING 105 CM INTERAXIAL GALVANIZED FRAME

ART 12202
105 cm interaxial
110 cm length
Ø 48 mm tube
210 cm height



BUSHING SCAFFOLDING 105 CM INTERAXIAL GALVANIZED HALF FRAME

ART 14300
105 cm interaxial
110 cm length
Ø 48 mm tube
110 cm height




DIAGONALS - BRACES GALVANIZED

ART. 13201
Bushing scaffolding galvanized diagonal
210 cm length, Ø 27 mm tube
ART. 13203
Bushing scaffolding galvanized horizontal brace
170 cm length, Ø 27 mm tube
ART. 13204
Bushing scaffolding 105 galvanized small lateral brace
105 cm length, Ø 27 mm tube



STANDARD GALVANIZED CONTAINER

ART. 15212
Galvanized scaffolding 105
38 pieces (123x200x10 cm)

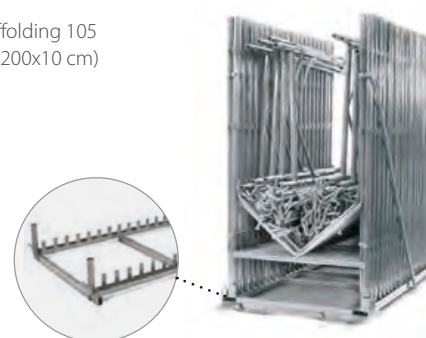

PIN SCAFFOLDING 105 CM INTERAXIAL PAINTED FRAME

ART 12100
105 cm interaxial
110 cm length
Ø 48 mm tube
210 cm height



PIN SCAFFOLDING 105 CM INTERAXIAL PAINTED HALF FRAME

ART 14205
105 cm interaxial
110 cm length
Ø 48 mm tube
110 cm height




PAINTED UPRIGHT FOR PARAPET

ART. 14322 painted upright for parapet
for pin scaffolding 1 mt tubo Ø 48 mm
ART. 14323 painted upright for parapet
for pin scaffolding 2 mt tubo Ø 48 mm



PAINTED PEDESTALS

ART 14010 Painted fixed pedestal
15 cm Ø 40 mm tube, Ø 144 mm plate
ART 14030 Painted adjustable pedestal
30 cm Ø 40 mm tube, Ø 144 mm plate
ART 14050 Painted adjustable pedestal
50 cm Ø 40 mm tube, Ø 144 mm plate
ART 14075 Painted adjustable pedestal
75 cm Ø 40 mm tube, Ø 144 mm plate
ART 14100 Painted adjustable
pedestal 100 cm Ø 40 mm tube,
Ø 144 mm plate

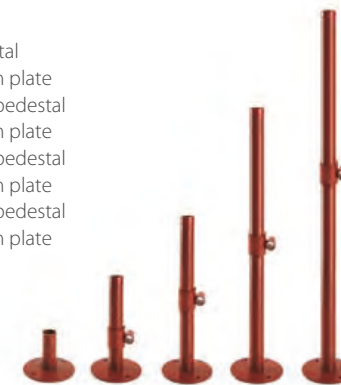

PIN SCAFFOLDING 105 CM INTERAXIAL GALVANIZED FRAME

ART 12203
105 cm interaxial
110 cm length
Ø 48 mm tube
210 cm height



PIN SCAFFOLDING 105 CM INTERAXIAL GALVANIZED HALF FRAME

ART 12205
105 cm interaxial
110 cm length
Ø 48 mm tube
110 cm height



DIAGONALS - BRACES

ART 13100 Pin scaffolding 105 painted
diagonal 202 cm length, Ø 27 mm tube
ART 13135 Galvanized version
ART 13140 Pin scaffolding 105 painted plan
cross diagonal 202 cm length, Ø 27 mm tube
ART 13136 Galvanized version
ART 13110 Pin scaffolding 105 painted
horizontal brace 180 cm length, Ø 27 mm tube
ART 13130 Galvanized version



GALVANIZED PEDESTALS

ART 14011 Galvanized fixed pedestal
15 cm Ø 40 mm tube, Ø 144 mm plate
ART 14015 Galvanized adjustable pedestal
30 cm Ø 40 mm tube, Ø 144 mm plate
ART 14016 Galvanized adjustable pedestal
50 cm Ø 40 mm tube, Ø 144 mm plate
ART 14017 Galvanized adjustable pedestal
75 cm Ø 40 mm tube, Ø 144 mm plate
ART 14018 Galvanized adjustable
pedestal 100 cm Ø 40 mm tube,
Ø 144 mm plate



Scaffolding

props | wheelbarrows | accessories

PAINTED UPRIGHT FOR PARAPET

ART. 14320
1 mt painted upright for parapet
for bushing scaffolding Ø 48 mm tube
ART. 14330
Galvanized version



PAINTED UPRIGHT FOR PARAPET

ART. 14321
2 mt painted upright for parapet for
bushing scaffolding Ø 48 mm tube
ART. 14331
Galvanized version



BEAM FRAME 55 CM

ART. 14523
Ø 48 mm tube, Ø 27 mm corner tube
ART. 14526
Galvanized version




SHORT START TUBE FOR BEAM FRAME 55 CM

ART. 14522
Ø 48 mm tube, inclined tube Ø 27 mm
both painted
ART. 14537
Galvanized version



BEAM FRAME FOR SHORT START 105 CM

ART. 14525
Ø 48 mm painted tube
ART. 14230
Galvanized version

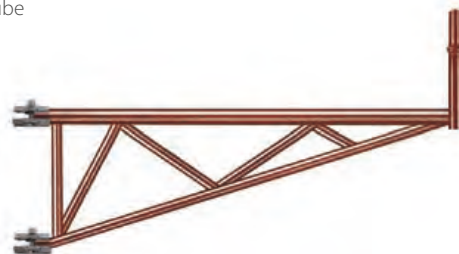

SHORT START TUBE FOR BEAM FRAME 105 CM

ART. 14520
Ø 48 mm tube, inclined tube Ø 27 mm
both painted
ART. 14231
Galvanized version



BEAM FRAME FOR SHORT START 155 CM

ART. 14521
Ø 48 mm painted tube
ART. 14540
Galvanized version



SHORT START TUBE FOR BEAM FRAME 155 CM

ART. 14524
Ø 48 mm tube, inclined tube Ø 27 mm
both painted
ART. 14541
Galvanized version



CM 65 PAINTED SUPERIOR REDUCED ELEMENT FOR BUSHING SCAFFOLDING 105

ART. 14221
65 cm length
Ø 48 mm tube
210 cm height
painted
ART. 02201
Galvanized version



CM 40 PAINTED INFERIOR REDUCED ELEMENT FOR BUSHING SCAFFOLDING 105

ART. 14222
40 cm length
Ø 48 mm tube
210 cm height
painted
ART. 14227
Galvanized version



FRAME LARGE START 180/105

ART. 14225
width on base
180 cm
width on top
105 cm
height 210 cm
tube Ø 48
ART. 14542
Galvanized version



SLEWING WHEEL

ART. 15500
Slewing wheel for scaffolding
200x40 mm
Ø 40 x 190 mm tube
ART. 15510
Slewing wheel for scaffolding
200x40 mm with brake
Ø 40 x 190 mm tube



CM 65 PAINTED SUPERIOR REDUCED ELEMENT FOR BUSHING SCAFFOLDING 105

ART. 14220
65 cm length base
105 cm interaxial top
Ø 48 mm tube
210 cm height
painted
ART. 14226
Galvanized version



CM 40 PAINTED SUPERIOR REDUCED ELEMENT FOR BUSHING SCAFFOLDING 105

ART. 14223
40 cm length base
105 cm interaxial top
Ø 48 mm tube
210 cm height
painted
ART. 14228
Galvanized version



PIN FOR SCAFFOLDING

ART. 15400
Pin for scaffolding Ø 12 mm
ART. 15410
Galvanized version



PAINTED TUBE

ART. 15254
Galvanized tube for scaffolding anchorage for OP50
500 mm length, Ø 48 mm tube
ART. 15251
Galvanized tube for scaffolding anchorage for GP12 and
OP12 500 mm length, Ø 48 mm tube, Ø 12 mm pin
ART. 15251/30
Galvanized tube for scaffolding anchorage for GP12 and
OP12 300 mm length, Ø 48 mm tube, Ø 12 mm pin



Scaffolding

props | wheelbarrows | accessories

CM 120 OBLIQUE RAILING FOR SCAFFOLDING

ART. 14360
210 cm lenght, Ø 48 mm tube
ART. 14229
Galvanized version



CM 360/540 BEAM FRAME

ART. 14500 360 cm. bushing scaffolding 105
Ø 48 mm tube, Ø 27 mm oblique tube
ART. 14232 Galvanized version
ART. 14510 540 cm bushing scaffolding 105
Ø 48 mm tube, Ø 27 mm oblique tube
ART. 14233 Galvanized version



LATERAL GATE FOR BUSHING SCAFFOLDING 105

ART. 14527
105 cm lenght
Ø 27 mm tube
105 cm height
painted
ART. 14235
Galvanized version



HEAD GATE CM 55

ART. 14529
105 cm lenght Ø 27 mm tube
105 cm height painted
ART. 14544
Galvanized version



ANTI-STONE SHIELD SAFETY SYSTEM FOR SCAFFOLDING 150 CM

ART. 14361
Ø 48 mm tube
painted
ART. 14362
Galvanized version



CONNECTION CROSS-BAR FOR BEAM FRAMES

ART. 14515
Ø 48 mm tube, Ø 27 mm oblique tube
ART. 14234
Galvanized version



HEAD GATES FOR BUSHING SCAFFOLDING 105 WITH WEDGES

ART. 14528
105 cm lenght
Ø 27 mm tube
105 cm height
painted
ART. 14543
Galvanized version



PLAN CROSS DIAGONAL FOR METALLIC BOARDS


ART. 13115
203 cm lenght Ø 27 mm tube painted
ART. 13116
Galvanized version



GALVANIZED TUBE AND COUPLER-SCAFFOLDING

Ø 48 mm welded tube

galvanized	standard lenght cm
2501	100
4701	120
2601	150
4801	180
2701	200
4901	250
5001	270
2801	300
5101	360
2901	400
5201	450
3001	500
5301	540
3101	600



STANDARD COUPLER

ART. 16001
Standard galvanized
steel coupler



SLEWING COUPLER

ART. 16013
Slewing galvanized
steel coupler



SWIVEL JOINT SHEET METAL

Joint in pressed
sheet metal 4 bolts



RIGHT ANGLE COUPLER

ART. 16012
Right angle galvanized
steel coupler




CONNECTING PIN

ART. 15300
Connecting pin for galvanized tube.
200 mm lenght



SHEET METAL ORTHOGONAL JOINT

Joint in pressed sheet
metal 4 bolts



Scaffolding

props | wheelbarrows | accessories


GALVANIZED BOARDS FOR SCAFFOLDING

Galvanized board for accident prevention for scaffolding
50 cm width, 180 cm length, 5 cm height, Kg 14 weight, Kg 300/m2 max. charge

ART. 11020 with hook left

ART. 11030 with hook right

ART. 15220 container for galvanized boards, 40 pieces capacity

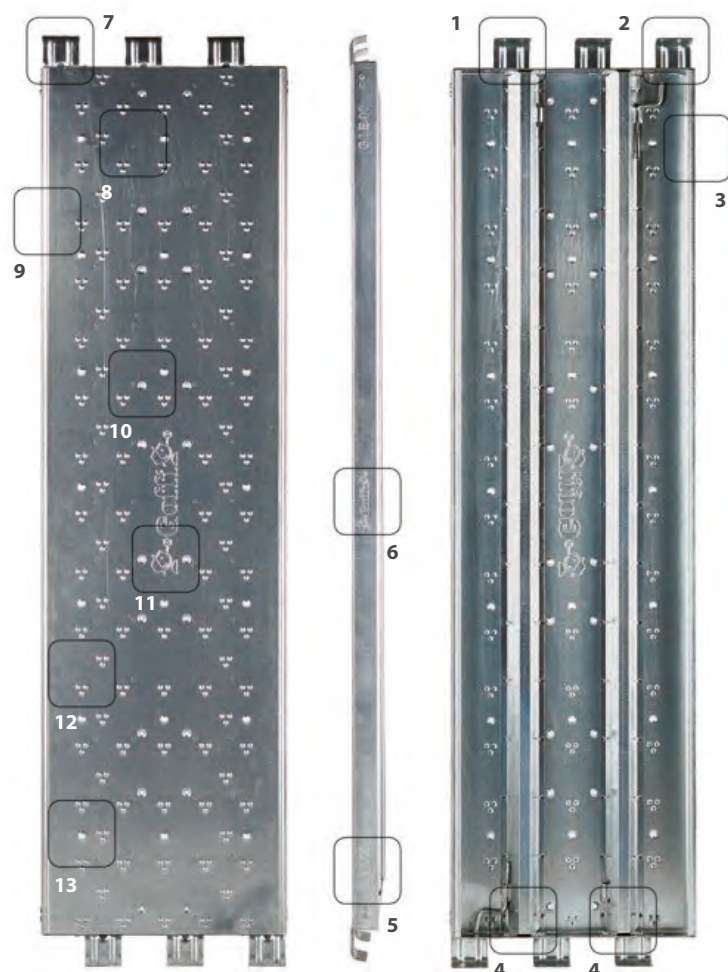

- 1 Rivet system for perfect assembling between reinforced parts.
- 2 Rivet system on the reinforced parts to avoid welding that, after some time, causes breaking or rust.
- 3 Double edge for a safe and sure transport.
- 4 Two reinforcing longitudinal bars.
- 5 Year of production pressed on each profile.
- 6 Goffi mark pressed on each profile.
- 7 3 mm thick-pressed hooks.
- 8 Rivet system to avoid weldings and to increase user's stability.
- 9 Reinforced edge to help stocking.
- 10 20 holes for a rapid water exit.
- 11 Central Goffi mark on the board.
- 12 Non-slip system.
- 13 21 stability holes to increase user's stability.

BOARD CONTAINER 40 PIECES

ART. 15220




GALVANIZED BOARD WITH TRAP-DOOR

1800 mm length, 550 mm width, 50 mm thickness, approx. 23 Kg.

ART. 11012 with hook left

ART. 11035 with hook right



FOOT-STOP FLAT GALVANIZED BOARD

ART. 11011 Foot-stop flat galvanized board. 1800 mm length, 200 mm width, approx. 4 Kg.

ART. 11013 Lateral foot-stop galvanized board. 1050 mm length, 200 mm width, approx. 2,5 Kg.



TUBULAR LADDER WITH HOOKS

Ø 32 x 2 mm tube, Ø 17,9 x 1,6 mm rungs

ART. 10055

Tubular ladder with hooks for 2m galvanized scaffolding, Ø 32 mm tube

ART. 10050

2 m painted tubular ladder for scaffolding, Ø 32 mm tube



OPEN HOPPER

ART. 18002

Open hopper

Material: first rate linear polyethylene

Dimensions: Height 85 cm

Length 98 cm

Width 74 cm

Lower diameter 39 cm



RUBBISH CHUTE

ART. 18000

Rubbish chutes

Material: first rate linear polyethylene

Dimensions: upper external diameter 59 cm

Upper internal diameter 50 cm

Downer diameter 30 cm

Height 108 cm

Weight: 9,5 Kg



WINDOW FIXING FRAME

ART. 17600

Galvanized steel frame to

fix on windows

or on roof projections.

(on request)



SICURTUBO

ART. 16070



SICURBASE

ART. 16072



TUBOSTOP

ART. 16071



TUBOSTIL

ART. 16073





Props

scaffolding | wheelbarrows | accessories

POST SHORES

Post Shores type: double slabs, fork, fixed cross

The figures above indicate the load breaking including the coefficient of safety. Results of loading tests:

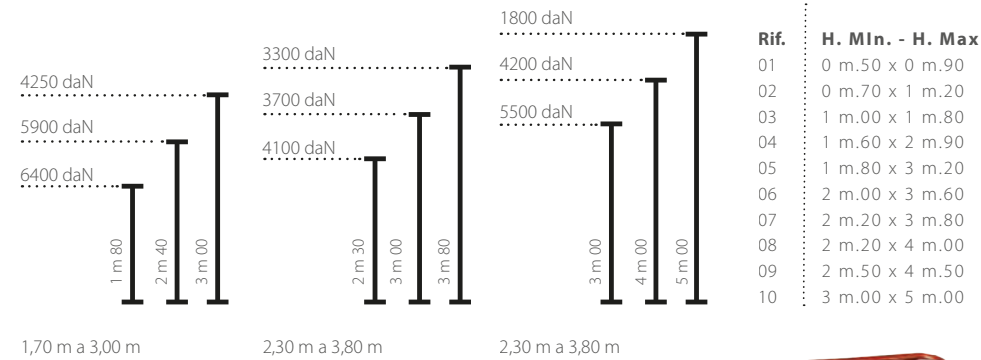

Whit fork



Grooved slab




With fixed cross



Double slabs

TECHNICAL DETAILS

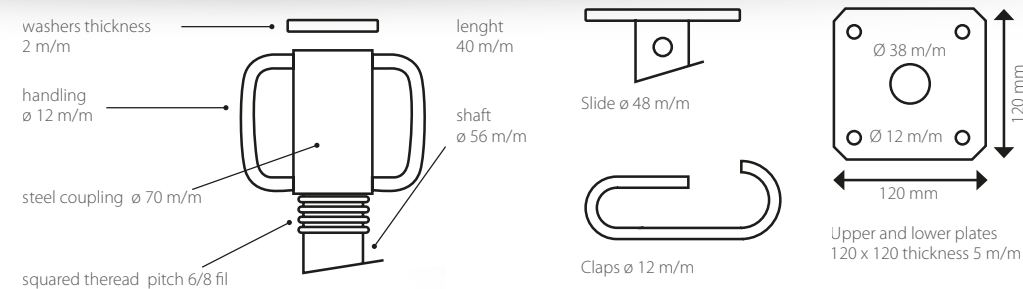

PAINTED ADJUSTABLE PROPS WITH PLANE BASED PLATES, CAST IRON COUPLING BOX AND ANTI-CRUSHING SYSTEM

Ø 56 x 1.8 mm external tube with threaded male, cast iron coupling box
Ø 48 x 1.8 internal tube,
Ø 12 mm pin, 120 x 120 x 4 mm plate

ART. 6010 170/290
ART. 6001 190/330
ART. 6002 200/360
ART. 6004 220/400
ART. 6007 250/440
ART. 6020 50/80
ART. 6021 80/120
ART. 6023 100/170
ART. 6025 120/210



GALVANIZED ADJUSTABLE PROPS WITH PLANE BASED PLATES, CAST IRON COUPLING BOX AND ANTI-CRUSHING SYSTEM

Ø 56 x 1.8 mm external tube with threaded male, cast iron coupling box
Ø 48 x 1.8 internal tube,
Ø 12 mm pin, 120 x 120 x 4 mm plate

ART. 6145 170/290
ART. 6147 190/330
ART. 6150 200/360
ART. 6149 220/400
ART. 6151 250/440




SELF-CERTIFICATED PROPS-ITALY, UE TYPE

All our props are marked, recognizable and they have a self-certification which identifies the characteristics and the load capacities with specially constructed machines (see photo), props were subjected to horizontal load of 20 DaN, with progressive loads until reaching the collapse of the prop.

Anti-unthreading system of the internal tube


To stop the internal tube leaving the external tube, it is deformed in such a way as to stop at an exact point, and therefore does not unthread. The absence of the whole within the last 300 mm at the end of the external tube avoids any fixing which could be unsafe for the user. Also, the fact that the tube is longer gives better stability. In this way we can avoid such unsafe events as:

- The internal tube at the longest point can fall down out of the structure;
- The tube can crash onto the user.

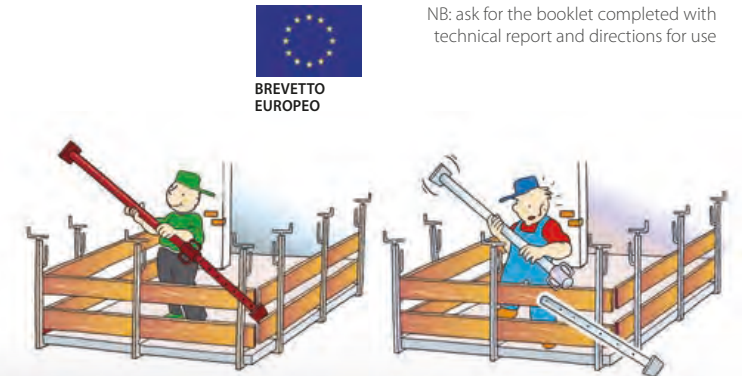

NB: ask for the booklet completed with technical report and directions for use

- 1 - The German safety at work rule states that a prop should have a safety stop to avoid unthreading (DIN 4424 5.6)
- 2 - The German safety at work rule states "At its maximum opening the covered part of the internal tube must be at least 300 mm, without taking into consideration the parts that are on movement of the regulation system"
- 3 - The German Rule ask "The complete unthreading of the coupling box for the regulation is to avoid in a constructive way (DIN 4424 punto 5.5.4).

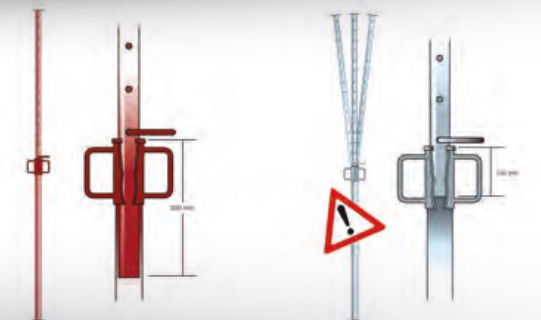


Anti-crushing system

On most props if the external tube is allowed to fall down sharply there is a danger of crushing a hand between the external prop and the plate on the internal prop.


Thanks to a longer tube we can avoid this danger

- 1 - The German standard (DIN 4424 5.7) states that the props should be manufactured in such a way that a minimum position the distance between the lower corner of the internal plate and the top of the internal tube should be 100 mm

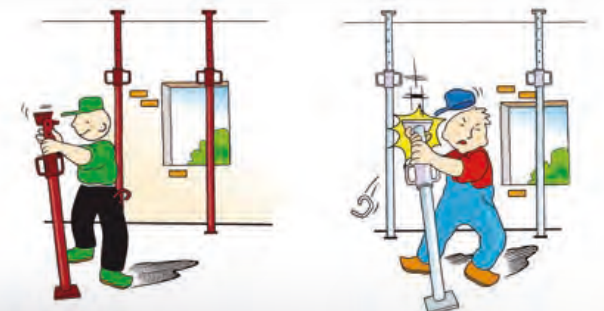

The coupling box

The space between the internal tube and the coupling box has been reduced. This has meant that at maximum tests, there is inferior pin deformation. This is because we have created a flat space that is now supported by the washer and the coupling box. In the past, and in other traditional production, the pin can get deformed because there is too much space and all of the weight is taken on the pin and the wash.

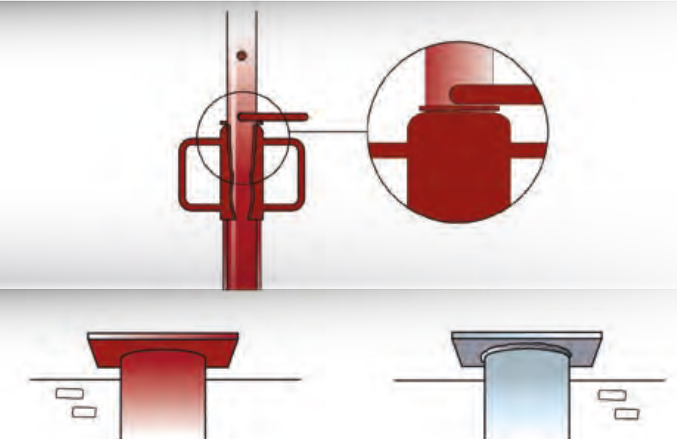

Props

scaffolding | wheelbarrows | accessories

HEAVY-DUTY POST SHORES

Heavy-Duty Post Shores

The figures above indicate the load breaking including the coefficient of safety. Results of loading tests:



Buffer of reinforcement at the base.



Cast iron sleeve.



Prop reinforced with cast iron sleeve.



Collar nut with minimum clearance safety disengagement system.




Push-pull.



HIGH CAPACITY PROPS UNI EN 1065

CLASS D Capacity 20 kn
CLASS E Capacity 30 kn

TECHNICAL DETAILS

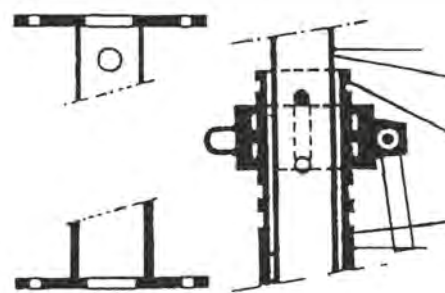


Threading lenght
250 m/m

Coupling lenght
50 m/m



Claps \varnothing 16 m/m



CONTAINER FOR PROPS

ART. 15222


Dim. 118.5 x 104 x 64 cm
Weight 30 Kg.
Capacity: 50 plane based plates props
40 props with welded cross-bar.

ART. 15225

Dim. 118.5 x 104 x 100 cm.
Weight 45 Kg.
Capacity: 100 plane based plates props
60 props with welded cross-bar

ART. 15226




"ECO" props container with tube on \varnothing 48mm
Capacity: 100pcs



square pipe



pipe

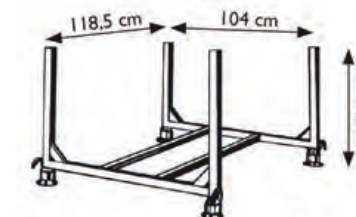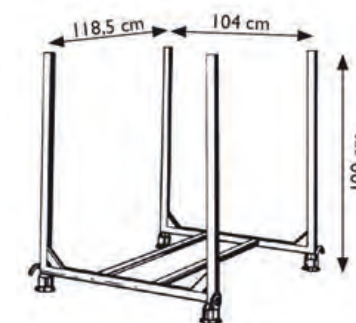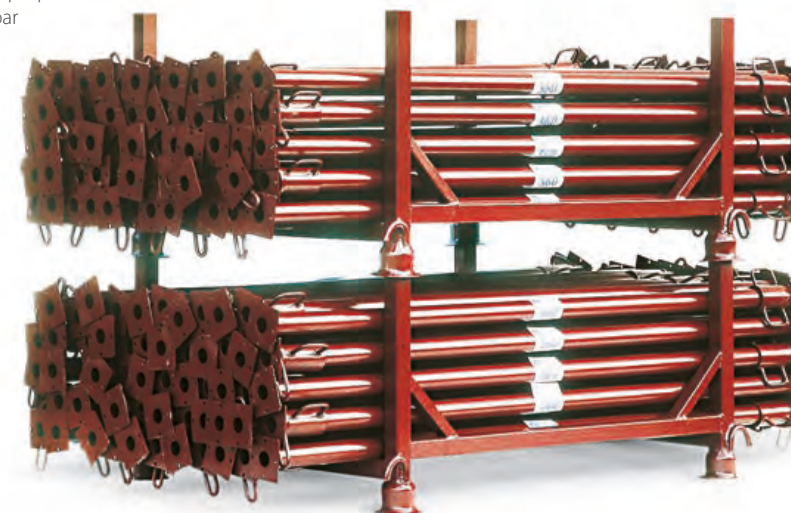

TRIPOD

ART. 21201

Galvanized tripod for prop support



FOURWAY

ART. 21100

Painted gallows for wooden beams

ART. 21100

Galvanized fork for wooden beams



AUREA BASIC

Steel wheelbarrow with handle grip, Ø 30 mm tubular frame, capacity Lt 70
ART. 1003 Ø 350 mm pneumatic wheel, steel rim
ART. 1004 Ø 350 mm wheel with solid rubber tyre, steel rim



AUREA STRONG

Steel wheelbarrow strong type, Ø 30 tubular frame, capacity Lt.70
ART. 1005 Ø 350 mm pneumatic wheel, steel rim
ART. 1006 Ø 350 mm wheel with solid rubber tyre, steel rim



AUREA BASIC PARTIALLY DISASSEMBLED

Steel wheelbarrow partially disassembled with handle grip, Ø 30 mm tubular painted frame, pressed galvanized tray, capacity Lt 70
ART. 1015 Ø 350 mm pneumatic wheel, steel rim
ART. 1016 Ø 350 mm wheel with solid rubber tyre, steel rim



AUREA WITH PVC TRAY

Wheelbarrow with Ø 30 mm painted, tray capacity Lt 100
ART. 18444 Ø 350 mm pneumatic wheel



AUREA TIPPER

Steel wheelbarrow with tipping handles, Ø 30 mm tubular frame, welded and painted pressed tray, capacity Lt 70
ART. 1007 Ø 350 mm pneumatic wheel, steel rim
ART. 1008 Ø 350 mm wheel with solid rubber tyre, steel rim

Technical information and using instruction are given with this wheelbarrow, in conformity with european rules OE Bench Mark



HEAVY WHEELBARROW

Iron frame "U" shape, tinfoil tray painted completely welded
ART. 1009 Ø 350 mm pneumatic wheel, steel rim
ART. 1010 Ø 350 mm pneumatic wheel, steel rim



TOTALLY DISASSEMBLED STEEL WHEELBARROW

Tubular frame Ø 30 mm, epoxy powder painted, painted tray, Lt 90 capacity
ART. 1019 Ø 380 mm pneumatic wheel
ART. 1020 wheel with solid rubber tyre



HEAVY TIPPER WHEELBARROW

Iron frame "U" shape, tinfoil tray painted completely welded, with tipping handles
ART. 1011 Ø 350 mm pneumatic wheel, steel rim
ART. 1012 Ø 350 mm pneumatic wheel, steel rim



TOTALLY DISASSEMBLED STEEL WHEELBARROW

Tubular frame Ø 30 mm, epoxy powder painted, galvanized tray, Lt 90 capacity
ART. 1021 Ø 380 mm pneumatic wheel
ART. 1022 wheel with solid rubber tyre



TRAYS FOR AUREA WHEELBARROWS

ART. 4010 Tray for Aurea Basic Lt 70
ART. 4011 Tray for Aurea Basic Partially disassembled Lt 70 thickness 0,9 mm
ART. 4020 Tray for Aurea Strong Lt 75
ART. 4030 Tray for Aurea Tipper Lt 70



WHEELS FOR AUREA WHEELBARROWS

ART. 5100 Ø 350 X 80 mm, pneumatic wheel for wheelbarrow Aurea steel rim
ART. 5200 Ø 350 X 80 mm, wheel with solid rubber tyre, steel rim



ADJUSTABLE TRESTLE FOR FLOOR

ART. 8000
800 cm min. height,
1500 cm max height
ART. 8004
110 cm min. height,
190 cm max height
ART. 8002
1500 cm min. height,
2700 cm max height



ADJUSTABLE TRESTLE FOR FLOOR

ART. 8010
Adjustable trestle for floor 2100 cm min.
width, 3900 max width 800 cm min. height,
1400 cm max height



BOTTOM-OPENING SKIPS

This products are all ratified and are supplied with a
conformity-declaration and user manual

ART. 14421 Litri 200
ART. 14422 Litri 250
ART. 14423 Litri 300
ART. 14424 Litri 400
ART. 14425 Litri 500
ART. 14428 Litri 1000



TIPPER GRABS

This products are all ratified and are supplied with a
conformity-declaration and user manual

ART. 14432 Litri 300
ART. 14433 Litri 400
ART. 14434 Litri 500



NETTINGS

ART. 16040
Green netting with weaving in polyethylene
monoyarn. Resistance to brake: 200 kg/m²



GALVANIZED CONSTRUCTION BARRIERS

Construction site barriers with system
interlocking fastening
Tabular frame Ø32 mm, height 1,1 mt
ART. 18321
Length mt 2
ART. 18322
Length mt 2,5



ROOF-PROTECTION SYSTEM

ART. 15060
System for slabs and balcony,
screw-blockage system, galvanized



LEVEL MAKERS

Metallic level maker epoxy coated to realize
rear-end lines for the laying of cement
blocks, expanded clay and bricks

ART. 16030
Level maker with pedal cm 210/320
ART. 16031
Level maker with pedal cm 220/400
ART. 16032
Level maker without pedal cm 210/320
ART. 16033
Level maker without pedal cm 220/400





GOFFI INDUSTRIES Srl

Via Legnago, 47
25089 Villanuova sul Clisi
Brescia - Italy
Tel. +39 0365 1870065-6
Fax +39 0365 1870006
info@goffiindustriessrl.it
www.goffiindustriessrl.it

